

**SILENT
OAT**

**LESS NOISE
MORE MUSIC**


**NEW LINE of
significantly improved:**

**VIBRATION DEADENING
NOISE ISOLATING
SOUND ABSORBING MATERIALS**




LESS NOISE
MORE MUSIC

SILENT
OAT

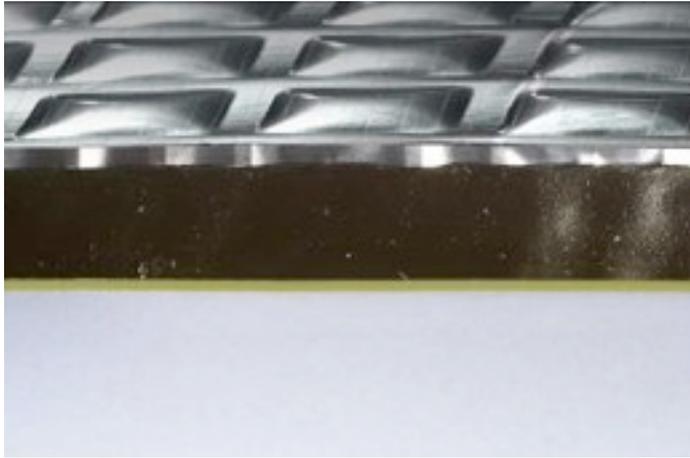


- New improved mastic
- Thickness 2.2mm
- 0.1 mm aluminum

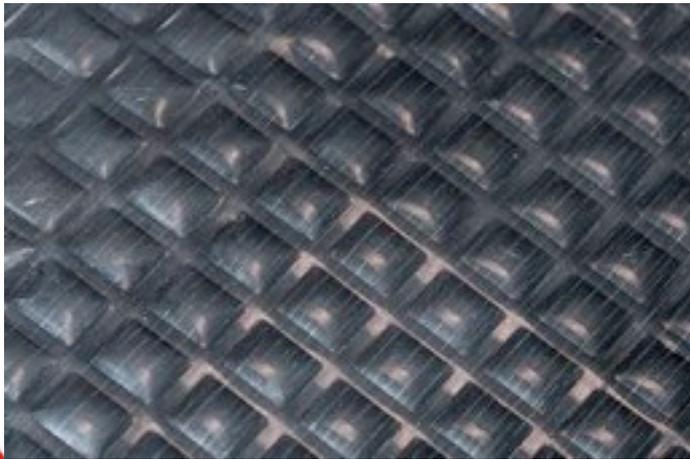

- Internal resonance killing surface pattern



SILENT
OAT

Transmission loss of different materials on metal surface

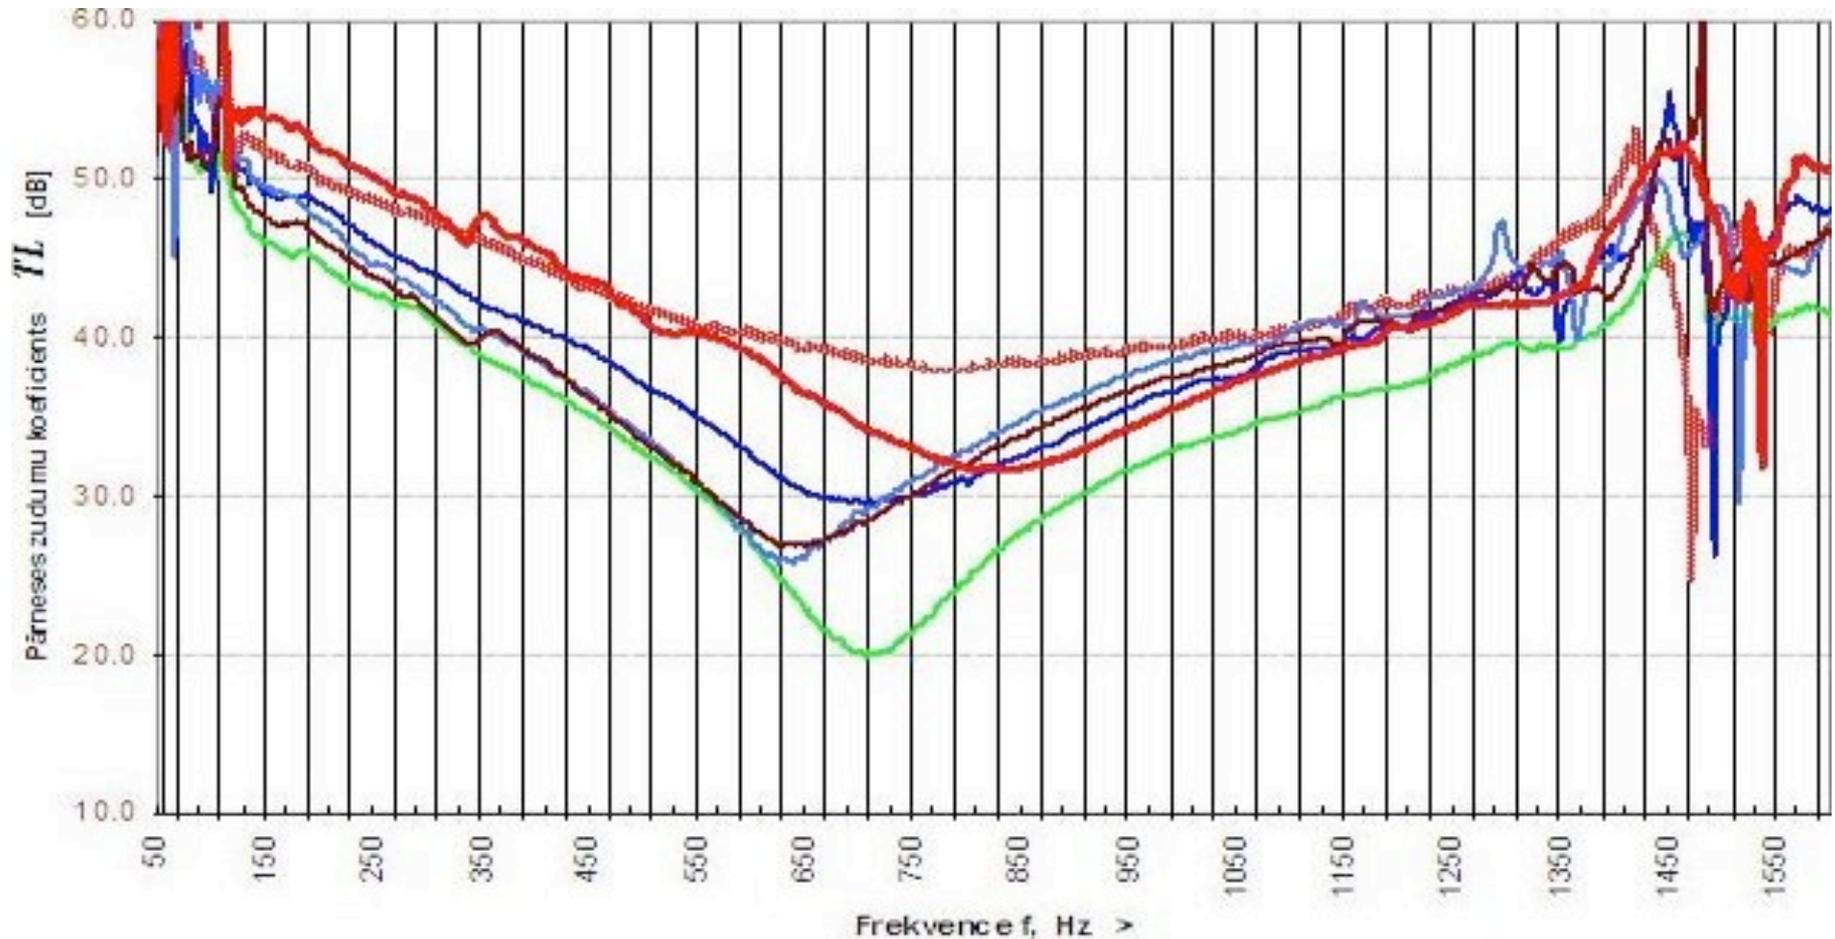


Steel 0.8mm; average; good performance; **Silent Coat**

**LESS NOISE
MORE MUSIC**

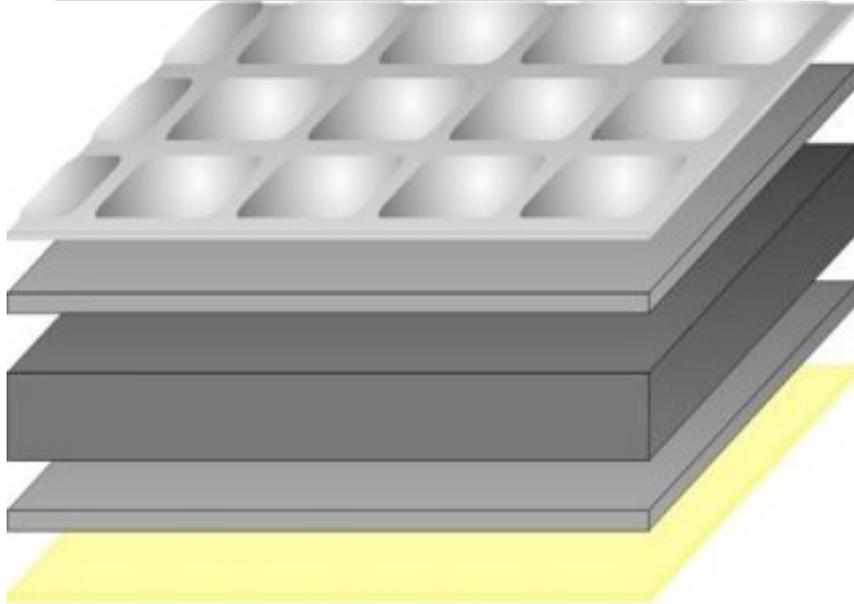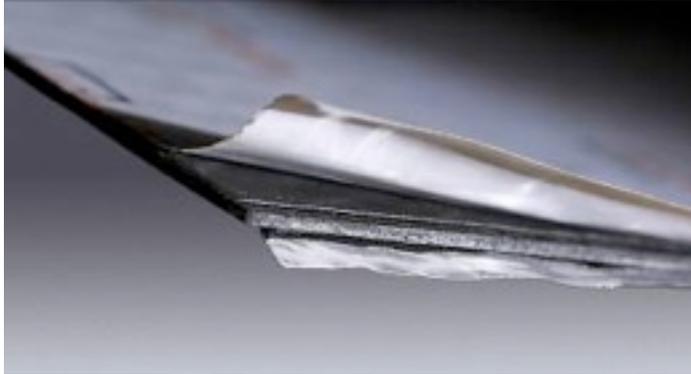


- Total thickness 4mm
- 0.1mm surfaced aluminum
- Mastic 1mm
- Stiff rubberized material to improve system stiffness
- Mastic 1.5mm

Silent Coat isolator

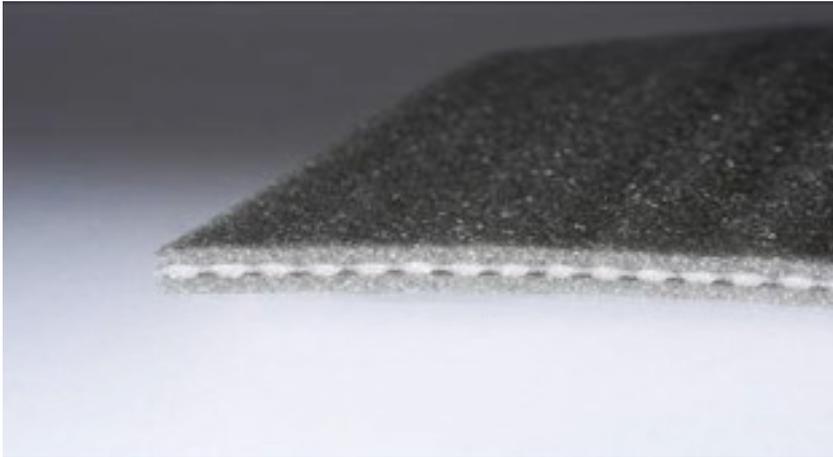

- Sandwich type
- Specially shaped middle layer to reduce going through noises
- Water resistant

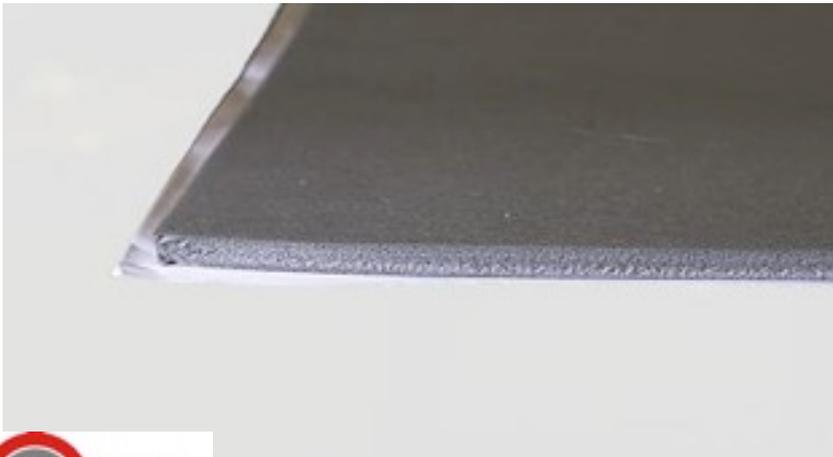

- Special foaming
- 30% softer than other materials
- Best performed on floor together with original mats


Silent Coat absorber



- Unique polyurethane sound absorber
- Specific elastic kills plastic rattling and allows easier to install
- Available in 10mm; 20mm; foamed; and pyramided shape
- Excellent on wheel arcs
- Absorbs a lot better than average materials



Transmission loss of foam materials

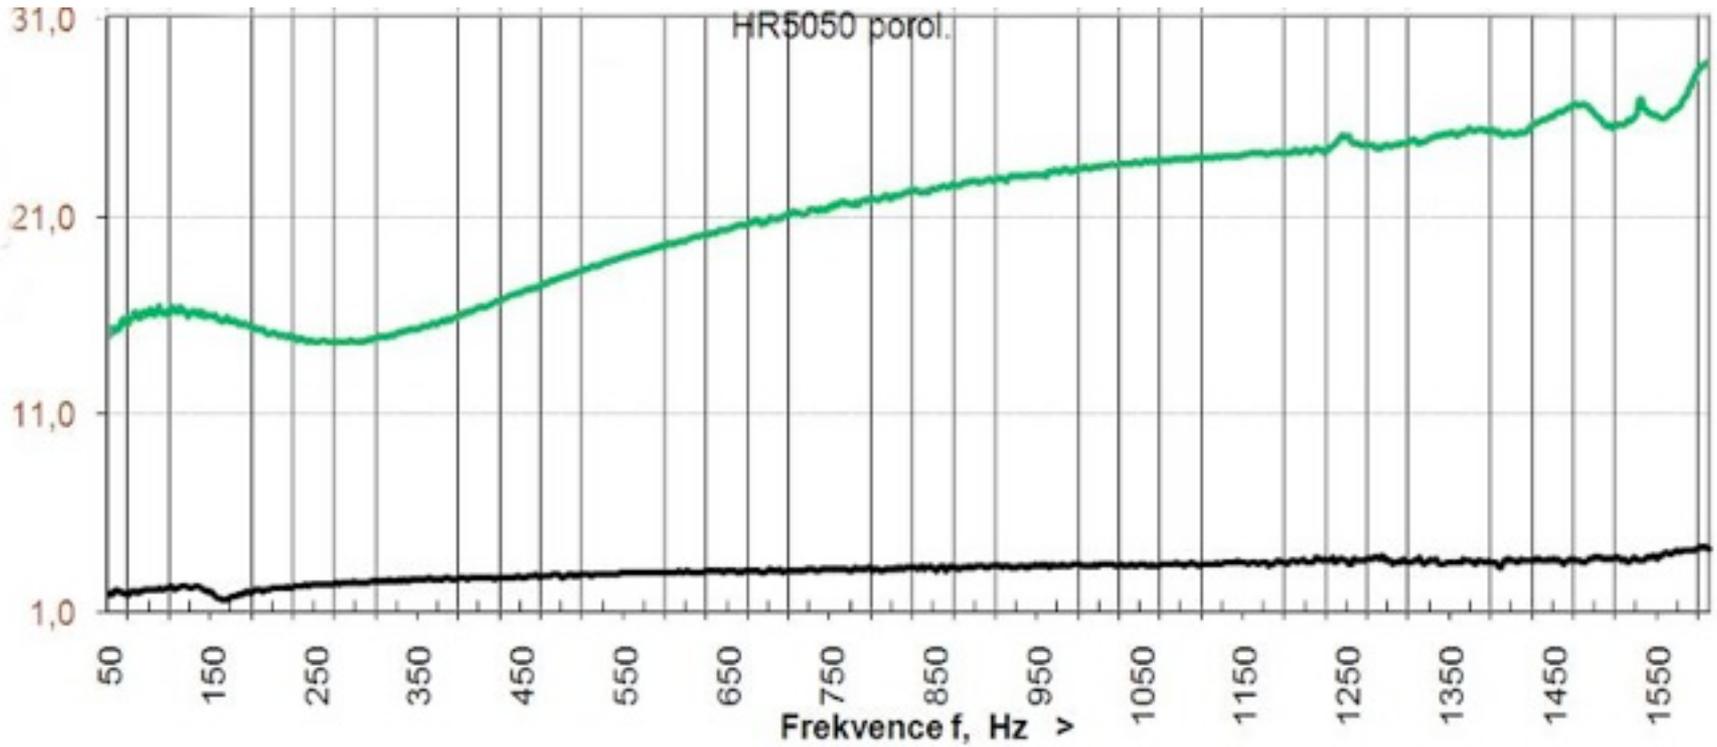

Average foam

Silent Coat absorber

**LESS NOISE
MORE MUSIC**

Thank you