

RELAX

Guy Bonneville
BLAM
DRIVEN BY PASSION


RA 1202D

ULTRA COMPACT CLASS D 2 CHANNELS AMPLIFIER

Compatible with OEM head units

KEY STRENGTHS

- Ultra compact
- Free emission
- Sound quality
- Stable under 2 Ω
- Efficacy: Stackable aluminium chassis with high heat dissipation
- Low noise operational amplifiers
- Low ESR capacitors
- Pseudo balanced inputs
- IR Technology

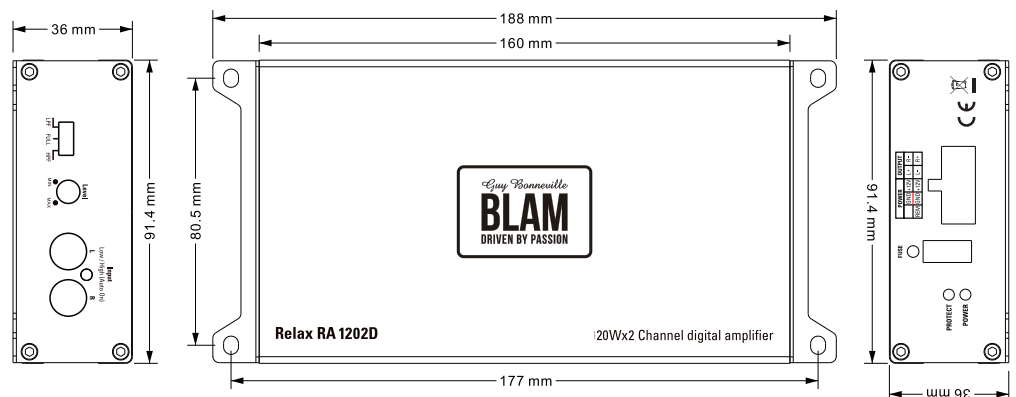

TECHNICAL FEATURE

High level inputs with auto-turn on

RCA low-level and high-level inputs: 0.5 V/15 V

RMS Power (4 Ω): 2 x 80 Watts RMS

RMS Power (2 Ω): 2 x 120 Watts RMS

RMS Bridged Power (4 Ω): 1 x 240 Watts RMS

Frequency response: 20 Hz - 22kHz

Low pass crossover: 120 Hz (Fixed) (12 dB/octave)

High pass crossover: 100 Hz (Fixed) (12 dB/octave)

Total harmonic distortion: 0.01%

Signal / noise ratio: > 90 dB

Protections: short circuit / low impedance / reversal of polarity / heat protection

Dimensions (L x W x H): 160 mm x 91.4 mm x 36 mm - 6.3" x 3.6" x 1.4"

Weight: 625 g

contact@blam-audio.fr

www.facebook.com/blamaudio

www.blam-audio.com